



RECOMMENDED P.C.B. LAYOUT (TOP VIEW)




[Schematic]

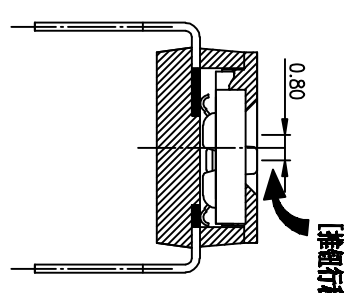

[推針行程]

- NOTES :
- 1> Specification:
    - 1> Operating force: 1000gf Max
    - 2> Operating Temperature: -40° to +85°
    - 3> Storage Temperature: -40° to +85°
    - 4> Mechanical Life: 3000cycles minimum
    - 5> Electrical Life: 2000cycles 25mA 24VDC
  2. PLATING:
    - GOLD FLASH 1u"(min.) SOLDER TAIL,
    - 3u" GOLD PLATING ON THE CONTACT AREA,
    - WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION

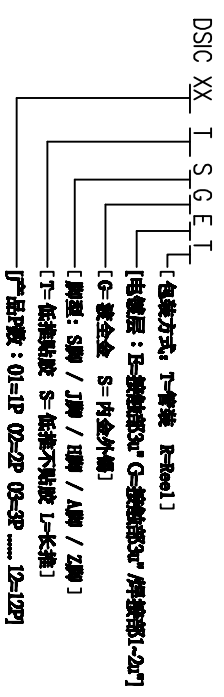

Number	Part Name	Material	Finished	TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	PROJECTION	TITLE
				LINER	ANGLES			
①	Actuator	UL94 V0	White	0 ± 0.25	0. ± 2°			總實特電子股份有限公司 Dongguan Kingtek Industrial Co., Ltd.
②	Cover	UL94 V0	Black	.00 ± 0.15	.0 ± 1°			BY DISC SERIES PITCH 2.54mm
③	Movable	Copper Alloy	3u"Gold	.000 ± 0.10	.00 ± 0.5°			PRODUCT FAMILY DISC SERIES
④	Terminal	Brass	1u"Gold					PRAT NO. DISCOSHG1T
⑤	Base	UL94 V0	Black					FILE NO. DISCOSHG1T-A
⑥	Terminal Contact	Brass	3u"Gold					SIZE UNIT SCALE SHEET REV.
								A4 mm 2 : 1 1OF 1 A